

Roofing Nails


15° Wire Coil, Full Round Head, Ring-Shank Roofing Nail

Features:

- Ideal for asphalt and synthetic slate roofing
- Large flat head, diamond point for easier driving
- Annular ring shank increases withdrawal resistance to provide a secure attachment to OSB or plywood roof decks
- Choose Type 316 stainless steel for seaside applications and superior corrosion resistance

Compatible Tools

To determine compatibility with your tools, see go.strongtie.com/toolmatrix or call Simpson Strong-Tie at (800) 999-5099 for assistance with fastener selection.

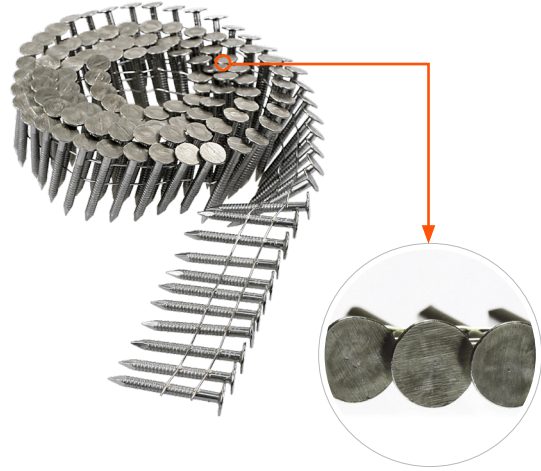

Type 316 Stainless Steel

Penny Size	Length (in.)	Shank Diameter (in.)	Head Diameter (in.)	Carton Quantity	Model No.
2d	1	0.120	3/8	3,600	T11A100RNJ
3d	1 1/4	0.120	3/8	3,600	T11A125RNJ
4d	1 1/2	0.120	3/8	3,600	T11A150RNJ
5d	1 3/4	0.120	3/8	3,600	T11A175RNJ

Type 304 Stainless Steel

Penny Size	Length (in.)	Shank Diameter (in.)	Head Diameter (in.)	Carton Quantity	Model No.
2d	1	0.120	3/8	7,200	S11A100RNB
3d	1 1/4	0.120	3/8	7,200	S11A125RNB
3d	1 1/4	0.120	3/8	720	S11A125RNB
3d	1 1/4	0.120	3/8	2,400	S11A125RNB
4d	1 1/2	0.120	3/8	7,200	S11A150RNB
4d	1 1/2	0.120	3/8	600	S11A150RNB
4d	1 1/2	0.120	3/8	2,400	S11A150RNB
5d	1 3/4	0.120	3/8	7,200	S11A175RNB
5d	1 3/4	0.120	3/8	480	S11A175RNB
5d	1 3/4	0.120	3/8	2,400	S11A175RNB

These products are subject to quantities on hand, or may require special-order, minimum order quantities and longer lead times. Call Simpson Strong-Tie for details **(800) 999-5099**.

To determine which fastener best suits your specific project, refer to our fastener software tools on p. 28.

Roofing Nails


15° Wire Coil, Full Round Head, Smooth-Shank Roofing Nail

Features:

- Ideal for asphalt and synthetic slate roofing
- Large flat head, diamond point for easier driving
- Annular ring shank increases withdrawal resistance to provide a secure attachment to OSB or plywood roof decks
- Choose Type 316 stainless steel for seaside applications and superior corrosion resistance

Compatible Tools

To determine compatibility with your tools, see go.strongtie.com/toolmatrix or call Simpson Strong-Tie at (800) 999-5099 for assistance with fastener selection.

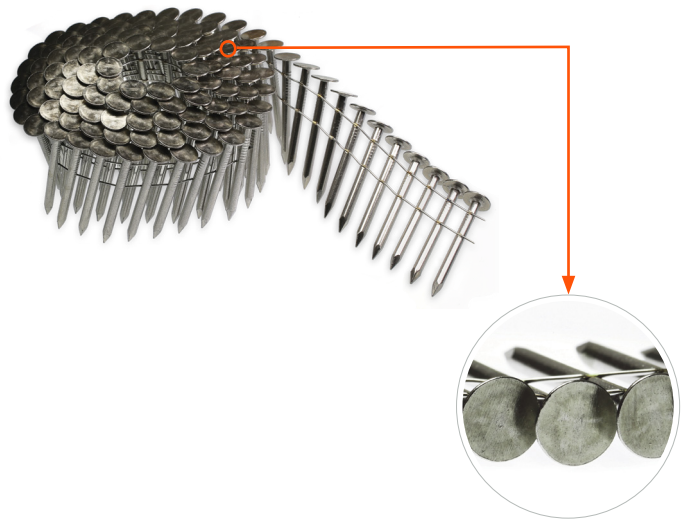

Type 316 Stainless Steel

Penny Size	Length (in.)	Shank Diameter (in.)	Head Diameter (in.)	Carton Quantity	Model No.
4d	1½	0.120	¾	3,600	T11N150RNJ

Type 304 Stainless Steel

Penny Size	Length (in.)	Shank Diameter (in.)	Head Diameter (in.)	Carton Quantity	Model No.
—	¾	0.120	¾	7,200	S11N075RNB
—	7⁄8	0.120	¾	7,200	S11N087RNB
2d	1	0.120	¾	7,200	S11N100RNB
3d	1¼	0.120	¾	7,200	S11N125RNB
3d	1¼	0.120	¾	2,400	S11N125RNJ
4d	1½	0.120	¾	7,200	S11N150RNB
4d	1½	0.120	¾	2,400	S11N150RNJ
5d	1¾	0.120	¾	7,200	S11N175RNB
5d	1¾	0.120	¾	2,400	S11N175RNJ

These products are subject to quantities on hand, or may require special-order, minimum order quantities and longer lead times. Call Simpson Strong-Tie for details **(800) 999-5099**.