

## DESIGN FEATURES


**TamlynWrap® Drainable Wrap** is a unique moisture management product from Tamlyn. This innovative product combines a high performance Water Resistant Barrier (WRB) with a unique drainage pattern. Its unique design can remove 100 times more bulk water from a wall versus standard wraps.

## BENEFITS

- Drains faster than other drainable wraps
- Can be installed in any direction
- Easier installation with 5' rolls
- Non-compressible filaments (1.5mm)
- Vapor permeable
- Type I Air Barrier
- Meets and exceeds ICC AC38 code requirements for WRB and drainability
- Works with various cladding materials

## WARRANTY

**Tamlyn** is committed to providing great products that are durable and long-lasting. All wraps offer a 15 Year Product Warranty and, when installed with other Tamlyn accessories as a system, Tamlyn offers a 25 Year Product and Labor Limited Warranty.

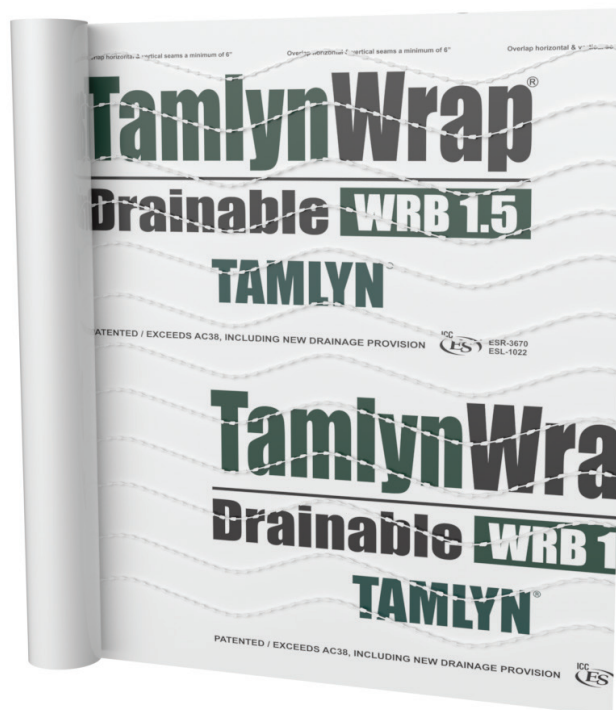

**Rolls are 5' x 100'**

Test Method		*Test Results
Dry Breaking Force / ASTM D 5034	Cross-Machine Direction	52.3 lbf
	Machine Direction	60.2 lbf
Water Resistance / AATCC Test Method No. 127 (55 cm water x 5 hrs)	Control	No water leakage
	Weathered	No water leakage
Water Vapor Transmission / ASTM E 96		19 perms
Cold Mandrel Bend	Cross-Machine Direction	House wrap did not crack; filaments did not crack
	Machine Direction	House wrap did not crack; filaments did not crack
Air Permeance / ASTM E2178 (material)		< 0.004 (CFM/ft <sup>2</sup> )
Air Barrier / ASTM E1677 (system)		Type 1 Air Barrier
Air Resistance		Pass
Water Resistance		Pass
Drainage Efficiency / ASTM E 2273		≥95.7%
Combustibility / ASTM E 84		FSI - Class A
		NSDI - Class A
Weathering - UV Resistance		120 days max

\*Based on testing averages.