


Drivall™ Rainscreen

Commercial & Residential Exterior Wall Drainage Mat

Drivall®
RAINSCREEN
BUILDING ENVELOPE SYSTEM

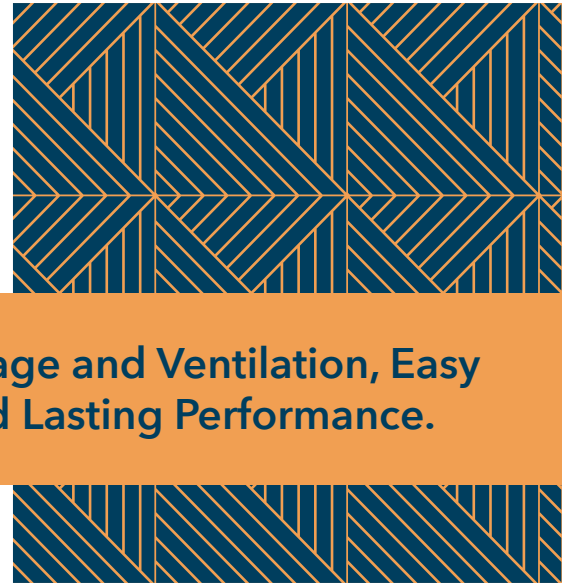

Superior Drainage and Ventilation, Easy Installation, and Lasting Performance.

FEATURES/BENEFITS

Description

Keene's **Drivall™ Rainscreen** products are engineered with precision to elevate the durability and performance of stucco and thin-stone veneers. Available in varying thicknesses—from 0.13" (013-1) for standard applications, to 0.4" (020-1 and 10mm) for enhanced moisture management, and a UV-resistant option for direct exposure—these rainscreens create a critical gap, facilitating continuous airflow and effective moisture evacuation.

This not only prevents the accumulation of moisture but also significantly, it reduces the risk of mold and structural damage, ensuring your facade's longevity.

Benefits

- **Superior Drainage:** Provides a continuous drainage path to expel water quickly & efficiently.
- **Enhanced Breathability:** Allows moisture vapor to escape, reducing the risk of mold & mildew.
- **Durability:** Polymer core resistant to most known corrosive chemicals, including solvents
- **Easy Installation:** Lightweight & easy to handle.
- **Integrated Seam Tape:** Pre-marked seam tape meets minimum horizontal seam overlap.
- **Reduced Installation Time:** Simple installation with mechanical staple hammer, and wider rolls mean fewer seams
- **Fire-Resistant:** Drivall™ Rainscreen products pass multiple wall assemblies that require NFPA 285

Applications

- Stucco
- Thin Stone / Brick
- Manufactured Stone
- Brick / Stone Masonry
- Lap Siding
- Siding Applications

Eliminate One Layer of Building Paper

- ✓ **IRC 2006 Code Book***
- ✓ **R703.6.3 Water-Resistive Barriers:**
Water-resistive barriers shall be installed as required in Section R703.2 and, where applied over wood-based sheathing, shall include a water-resistive, vapor-permeable barrier with a performance at least equivalent to two layers of Grade D paper.
- ✓ **Exception:**
Where the water-resistive barrier that is applied over wood-based sheathing has a water resistance equal to or greater than that of 60 minute Grade D paper and is separated from the stucco by an intervening, substantially non water-absorbing layer or designed drainage space.



Driwall™ Rainscreen

Commercial & Residential Exterior Wall Drainage Mat




Driwall™ Rainscreen Products

Product	Thickness	Length	Area	Roll Dimension	Roll Weight	Applications
Driwall™ Rainscreen 013-1	0.13 in / 3.8 mm	100 ft	400 sq ft	16" x 16" x 48"	35.0 lbs	*See above
Driwall™ Rainscreen 020-1	0.25 in / 6.0 mm	65 ft	260 sq ft	16" x 16" x 48"	19.5 lbs	*See above
Driwall™ Rainscreen 10 mm	0.40 in / 10.9 mm	45 ft	180 sq ft	16" x 16" x 48"	24.0 lbs	*See above
Driwall™ Rainscreen 075-1	0.75 in / 19.0 mm	50 ft	200 sq ft	18" x 18" x 48"	29.0 lbs	Brick and natural stone
Driwall™ Rainscreen UV	0.40 in / 10.2 mm	45 ft	180 sq ft	16" x 16" x 48"	24.0 lbs	Fiber cement, wood siding, open joint cladding, metal panels

Important Notice

Review all local and state building codes for specific fastening and installation requirements. Always follow all OSHA safety rules and use great attentiveness to prevent damage to Driwall Drainable HouseWrap during installation process. Any damaged Driwall™ Rainscreen should be repaired before installation of siding material.

*Aging in Accordance to ATSM E2556 A.1.2

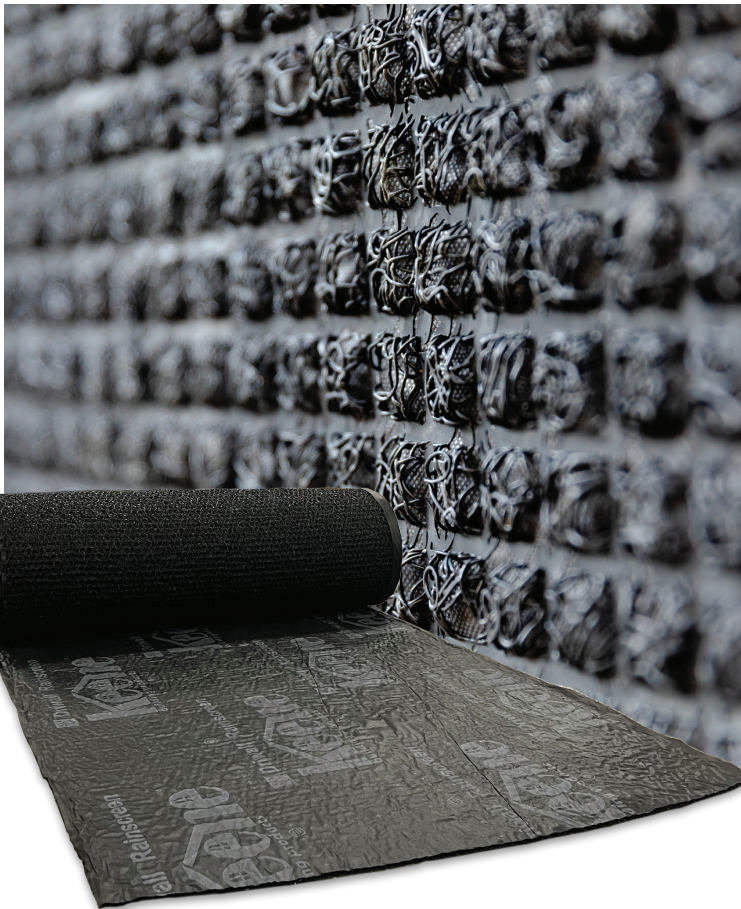

LIMITED WARRANTY: Keene Building Products, Inc. ("Keene") warrants its Driwall products against defects in material and workmanship for a period of Twenty-Five (25) years from the date of installation. Upon receipt of written notice, which must be given no later than thirty (30) days after discovery of the defect, Keene, at its sole option, will repair or replace the defective item(s) or refund the purchase price. Keene, at its sole option, may request that the defective item(s) be returned to Keene's principal offices for investigation and inspection. Keene is not required to repair or replace the defective item(s) or to refund the purchase price until it has received such item(s) that Keene has requested returned and has inspected such item(s).

The warranty provided above is extended solely to the person or entity that purchases the product directly from Keene, and no third party may rely thereon or assert any claim based on such warranty. The foregoing warranty is the only warranty provided by Keene and is to the exclusion of any other warranty, whether express or implied, including the implied warranties of merchantability and fitness for a particular purpose, all of which are expressly disclaimed. Keene's liability, if any, for damages based on any claim of any kind whatsoever, and regardless of the legal theory, with regard to any of its products shall be limited to the actual purchase price of the product(s) with respect to which such claim is made.

UNDER NO CIRCUMSTANCES SHALL KEENE BE LIABLE TO PURCHASER FOR COMPENSATION, REIMBURSEMENT OR DAMAGES ON ACCOUNT OF THE LOSS OF PRESENT OR PROSPECTIVE PROFITS OR REVENUE, EXPENDITURES, INVESTMENTS OR COMMITMENTS, AND IN NO EVENT SHALL KEENE BE LIABLE TO PURCHASER OR ANY OTHER PERSON OR ENTITY FOR SPECIAL, INCIDENTAL, INDIRECT, CONSEQUENTIAL OR EXEMPLARY DAMAGES. By way of example only, Keene will not be responsible for any damages purchaser may incur that are related to surface, subsurface or building conditions, damage to the structure or contents of any building, or for costs of repair and replacement except as may be expressly provided in this Limited Warranty (and subject to the terms and conditions hereof).

Keene shall not be liable for product failure resulting from any of the following: (i) products not installed in accordance with Keene's installation instructions; (ii) non-compliance with applicable building codes and regulations; (iii) the use of any of its products (A) in a manner for which it was not intended; (B) in a modified form without the permission of Keene, or (C) in combination with any other system, equipment or device not manufactured or sold by Keene.

Keene may change, modify, amend, replace or discontinue offering a product warranty, limited or otherwise. Any such change, modification, amendment, replacement or discontinuance shall be applicable to unsold products only, and Keene shall endeavor to give purchaser at least thirty (30) days prior written notice of same.

Claims or inquiries shall be addressed as follows:
Customer Service Department [Quality Control Manager]

KEENE BUILDING PRODUCTS, INC.
2926 Chester Ave.
Cleveland, OH 44114
P 440 605 1020 [877-514-5336]
F 440 605 1120