

Driwall™ Drainable Housewrap

Water-Resistant Barrier (WRB) with 1.5mm Drainage Gap



Efficient Moisture Management, Quick Installation, and Long-term Durability.

FEATURES/BENEFITS

Description

Driwall™ Drainable Housewrap is an innovative weather-resistant barrier designed to provide superior moisture management and durability for residential and commercial buildings. It facilitates rapid drainage of water and enhances the overall building envelope performance.

Driwall™ Drainable HouseWrap is constructed with a trilayer housewrap to provide great strength while also light weight to allow water vapor to pass through to protect the integrity of the wall cavity.

The importance of **Driwall™ Drainable Housewrap** lies in its moisture management capability. It prevents water accumulation inside wall cavities, reducing the risk of water damage and mold growth. Additionally, its breathability is key for maintaining indoor air quality and preventing internal condensation.

Benefits

- **Superior Drainage:** Provides a continuous drainage path to expel water quickly & efficiently.
- **Enhanced Breathability:** Allows moisture vapor to escape, reducing the risk of mold & mildew.
- **Durability:** Constructed from high-quality, tear-resistant material.
- **Easy Installation:** Lightweight & easy to handle.
- **Integrated Seam Tape:** Pre-marked seam tape meets minimum horizontal seam overlap.
- **Reduced Installation Time:** HouseWrap & Drainage plane in 1 product to reduce installation time

Applications

Fiber Cement • Wood • Vinyl • Metal • Stucco

Ease of Installation

Driwall™ Drainable Housewrap is designed for effortless application. Its lightweight, trilayer construction is easy to handle, reducing physical strain during installation. Pre-marked tack lines and integrated seam tape simplify alignment and overlap, ensuring a fast, code-compliant setup. These features save time and labor while maintaining superior performance.

Complete System

The complete **Driwall™ Drainable Housewrap** System includes **KeeneSeal 300**, a fluid-applied flashing, and **KeeneFlash 300**, high-performance flashing tape. Together, these products provide comprehensive moisture management by sealing penetrations, seams, and transitions. This integrated solution protects the building envelope against water intrusion, enhances durability, and simplifies the installation process for a superior finish.

Driwall™ Drainable Housewrap

Water-Resistant Barrier (WRB) with 1.5mm Drainage Gap




Physical Properties

Description	Measurement		Test Method
Tensile Strength	MD > 60 lbf*	CD > 45 lbf*	ASTM D-5034
Drainage Efficiency of Exterior Insulation & Finish Systems (EIFS) Clad Wall Assemblies	Greater than 92%		ASTM E-2273
Water Vapor Transmission of Materials	15 Perms (± 5)		ASTM E-96
Surface Burning Characteristics of Building Materials	Class B		ASTM E-84
Roll Length	100 ft		
Roll Width	60 in.		
Roll Coverage	500 sq.ft.		
Roll Weight	30 lbs.		
Rolls per Pallet	16		
Pallets per Truck	26		
Roll Diameter	1 ft.		

Important Notice

Review all local and state building codes for specific fastening and installation requirements. Always follow all OSHA safety rules and use great attentiveness to prevent damage to Driwall Drainable HouseWrap during installation process. Any damaged Driwall Drainable HouseWrap should be repaired before installation of siding material.

*Aging in Accordance to ATSM E2556 A.1.2

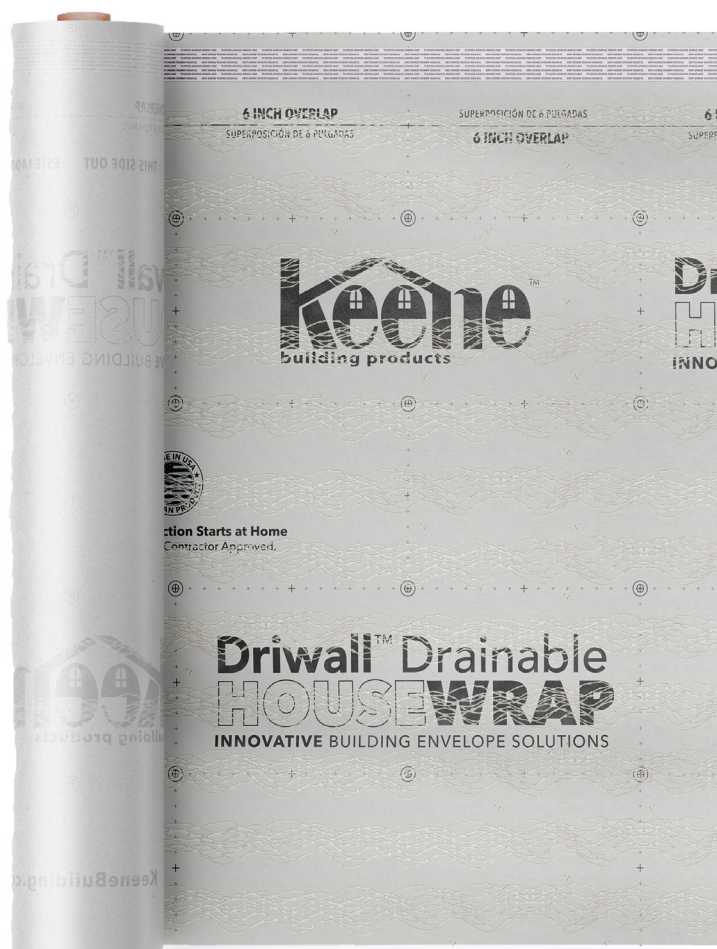

LIMITED WARRANTY: Keene Building Products, Inc. ("Keene") warrants its Driwall products against defects in material and workmanship for a period of Twenty-Five (25) years from the date of installation. Upon receipt of written notice, which must be given no later than thirty (30) days after discovery of the defect, Keene, at its sole option, will repair or replace the defective item(s) or refund the purchase price. Keene, at its sole option, may request that the defective item(s) be returned to Keene's principal offices for investigation and inspection. Keene is not required to repair or replace the defective item(s) or to refund the purchase price until it has received such item(s) that Keene has requested returned and has inspected such item(s).

The warranty provided above is extended solely to the person or entity that purchases the product directly from Keene, and no third party may rely thereon or assert any claim based on such warranty. The foregoing warranty is the only warranty provided by Keene and is to the exclusion of any other warranty, whether express or implied, including the implied warranties of merchantability and fitness for a particular purpose, all of which are expressly disclaimed. Keene's liability, if any, for damages based on any claim of any kind whatsoever, and regardless of the legal theory, with regard to any of its products shall be limited to the actual purchase price of the product(s) with respect to which such claim is made.

UNDER NO CIRCUMSTANCES SHALL KEENE BE LIABLE TO PURCHASER FOR COMPENSATION, REIMBURSEMENT OR DAMAGES ON ACCOUNT OF THE LOSS OF PRESENT OR PROSPECTIVE PROFITS OR REVENUE, EXPENDITURES, INVESTMENTS OR COMMITMENTS, AND IN NO EVENT SHALL KEENE BE LIABLE TO PURCHASER OR ANY OTHER PERSON OR ENTITY FOR SPECIAL, INCIDENTAL, INDIRECT, CONSEQUENTIAL OR EXEMPLARY DAMAGES. By way of example only, Keene will not be responsible for any damages purchaser may incur that are related to surface, subsurface or building conditions, damage to the structure or contents of any building, or for costs of repair and replacement except as may be expressly provided in this Limited Warranty (and subject to the terms and conditions hereof).

Keene shall not be liable for product failure resulting from any of the following: (i) products not installed in accordance with Keene's installation instructions; (ii) non-compliance with applicable building codes and regulations; (iii) the use of any of its products (A) in a manner for which it was not intended; (B) in a modified form without the permission of Keene, or (C) in combination with any other system, equipment or device not manufactured or sold by Keene.

Keene may change, modify, amend, replace or discontinue offering a product warranty, limited or otherwise. Any such change, modification, amendment, replacement or discontinuance shall be applicable to unsold products only, and Keene shall endeavor to give purchaser at least thirty (30) days prior written notice of same.

Claims or inquiries shall be addressed as follows:
Customer Service Department [Quality Control Manager]

KEENE BUILDING PRODUCTS, INC.
2926 Chester Ave.
Cleveland, OH 44114
P 440 605 1020 [877-514-5336]
F 440 605 1120