


ViperVent® Ridge

Lightweight Ridge Vent for Durable Roofs

VIPERVENT
ROOFING SOLUTIONS

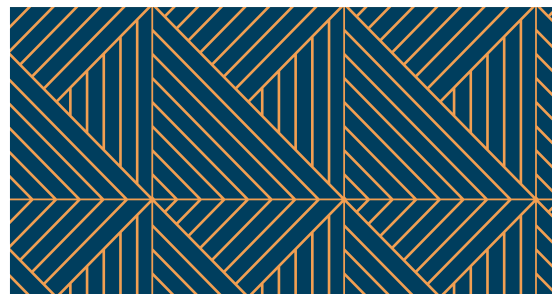

**Lightweight, Ultra Low-Profile Design.
Unmatched Ventilation & Rigidity.**

FEATURES/BENEFITS

Description

ViperVent® Ridge is a low-profile, high-performance solution for ridge ventilation in residential and commercial roofs. Made with Keene's patented Structured Strand™ extruded core and UV-resistant filter fabric, it allows humid air to escape while helping block rain, snow, debris, and insects. The double-density edge holds its shape under shingle pressure for a clean, finished look that blends seamlessly with the roofline.

Available as a roll or stick, **ViperVent® Ridge** works with asphalt, metal, wood, tile, and slate, and comes in multiple sizes to fit a range of roof designs.

Benefits


- **Superior Drainage:** Provides a continuous drainage path to expel water quickly & efficiently.
- **Enhanced Breathability:** Allows moisture vapor to escape, reducing the risk of mold & mildew.
- **Durability:** Polymer core resistant to most known corrosive chemicals, including solvents
- **Easy Installation:** Lightweight & easy to handle.
- **Ultra-Low Profile:** Designed to be nearly invisible and blend seamlessly with the roofline after installation.
- **Ridge Alignment:** Easily centered on the ridge.
- **Fire-Resistant:** All components of the ViperVent® system are NFPA® Class-A Fire-Rated products.

Applications


- Asphalt Roof
- Wood Roof
- Tile Roof
- Metal Roof
- Slate Roof



Rafter Framed Roof

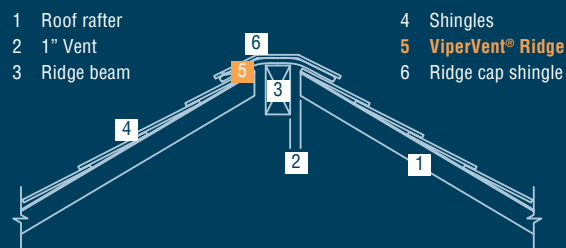

Engineered Framed Roof

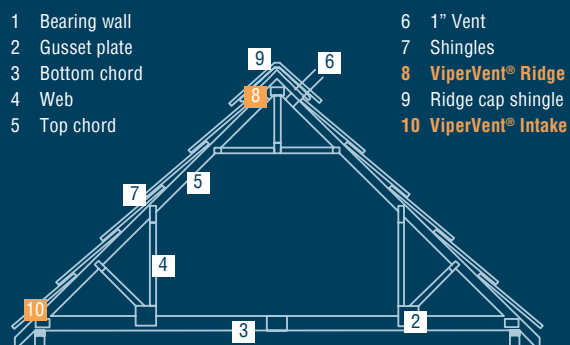

ViperVent® Ridge

Lightweight Ridge Vent for Durable Roofs



ViperVent® Ridge Products

Product	Length	Width	Coverage	Roll Weight	Rolls per Unit	Units per Truck
11" - ViperVent® Ridge 20	20 ft / 6.1 m	11 in / 27.9 cm	18.3 sq ft	3.9 lbs / 1.8 kg	72	26
11" - ViperVent® Ridge 50	50 ft / 15.2 m	11 in / 27.9 cm	45.8 sq ft	8.7 lbs / 3.9 kg	32	26
11" - ViperVent® Ridge 4 (Stick) ₁	Stick: 4 ft / 1.2 m Box: 80 ft / 24.4 m ₂	11 in / 27.9 cm	Stick: 3.6 sq ft Box: 73.3 sq ft	–	12	26
9" - ViperVent® Ridge 20	20 ft / 6.1 m	9 in / 22.9 cm	15 sq ft	3.7 lbs / 1.7 kg	90	26
9" - ViperVent® Ridge 50	50 ft / 15.2 m	9 in / 22.9 cm	37.5 sq ft	8.2 lbs / 3.7 kg	40	26
7" - ViperVent® Ridge 20	20 ft / 6.1 m	7 in / 17.8 cm	11.6 sq ft	3.3 lbs / 1.5 kg	108	26
7" - ViperVent® Ridge 50	50 ft / 15.2 m	7 in / 17.8 cm	29.2 sq ft	8.8 lbs / 4.0 kg	48	26

₁ - 11" ViperVent® Ridge 4 (Stick) - Nails not included

₂ - 11" ViperVent® Ridge 4 (Stick) - Packaged in a box. 80Length represents total amount per box.

Physical Properties

Description	Measurement
Core Material	Polypropylene
Thickness	0.625 in / 15.9 mm
Core Weight	2.0 oz/ft ²
NFVA	15 in ² /LF

Important Notice

Review all local and state building codes for specific fastening and installation requirements. Always follow all OSHA safety rules and use great attentiveness to prevent damage to ViperVent® Ridge during installation process. Any damaged ViperVent® Ridge should be repaired before installation of roofing material.
(*Aging in Accordance to ATSM E2556 A.1.2)



LIMITED WARRANTY: Keene Building Products, Inc. ("Keene") warrants its Drivall products against defects in material and workmanship for a period of Twenty-Five (25) years from the date of installation. Upon receipt of written notice, which must be given no later than thirty (30) days after discovery of the defect, Keene, at its sole option, will repair or replace the defective item(s) or refund the purchase price. Keene, at its sole option, may request that the defective item(s) be returned to Keene's principal offices for investigation and inspection. Keene is not required to repair or replace the defective item(s) or to refund the purchase price until it has received such item(s) that Keene has requested returned and has inspected such item(s).

The warranty provided above is extended solely to the person or entity that purchases the product directly from Keene, and no third party may rely thereon or assert any claim based on such warranty. The foregoing warranty is the only warranty provided by Keene and is to the exclusion of any other warranty, whether express or implied, including the implied warranties of merchantability and fitness for a particular purpose, all of which are expressly disclaimed. Keene's liability, if any, for damages based on any claim of any kind whatsoever, and regardless of the legal theory, with regard to any of its products shall be limited to the actual purchase price of the product(s) with respect to which such claim is made.

UNDER NO CIRCUMSTANCES SHALL KEENE BE LIABLE TO PURCHASER FOR COMPENSATION, REIMBURSEMENT OR DAMAGES ON ACCOUNT OF THE LOSS OF PRESENT OR PROSPECTIVE PROFITS OR REVENUE, EXPENDITURES, INVESTMENTS OR COMMITMENTS, AND IN NO EVENT SHALL KEENE BE LIABLE TO PURCHASER OR ANY OTHER PERSON OR ENTITY FOR SPECIAL, INCIDENTAL, INDIRECT, CONSEQUENTIAL OR EXEMPLARY DAMAGES. By way of example only, Keene will not be responsible for any damages purchaser may incur that are related to surface, subsurface or building conditions, damage to the structure or contents of any building, or for costs of repair and replacement except as may be expressly provided in this Limited Warranty (and subject to the terms and conditions hereof).

Keene shall not be liable for product failure resulting from any of the following: (i) products not installed in accordance with Keene's installation instructions; (ii) non-compliance with applicable building codes and regulations; (iii) the use of any of its products (A) in a manner for which it was not intended; (B) in a modified form without the permission of Keene, or (C) in combination with any other system, equipment or device not manufactured or sold by Keene.

Keene may change, modify, amend, replace or discontinue offering a product warranty, limited or otherwise. Any such change, modification, amendment, replacement or discontinuance shall be applicable to unsold products only, and Keene shall endeavor to give purchaser at least thirty (30) days prior written notice of same.

Claims or inquiries shall be addressed as follows:
Customer Service Department [Quality Control Manager]

KEENE BUILDING PRODUCTS, INC.
2926 Chester Ave.
Cleveland, OH 44114
P 440 605 1020 [877-514-5336]
F 440 605 1120